

SMHR²

INTEGRATED SEISMIC RECORDER & ACCELEROMETER

The SMHR2 combines Reftek's latest generation of universal broadband seismic recorder, with the advanced high resolution, force-balance accelerometer, model 147. Designed to facilitate installation, security and maintenance in a single, secure enclosure optimized for early warning system installations.

The SMHR2 features a 32-bit A/D performance boost and boasts a large dynamic range. The enhanced dynamic range enables the SMHR2 to record very small vibrations from its integrated seismic sensor, providing detailed data for seismic analysis.

The internal triaxial accelerometer is a force-balance accelerometer which converts acceleration signals into voltage signals to measure low frequency and ultra-low frequency motion. It features high sensitivity, large linear range, high resolution and high dynamic range making it perfectly suited to Earthquake Early Warning systems. The force balance feedback technique mitigates for mechanical characteristic limitations of conventional accelerometers and overcomes shortcomings in nonlinear distortion and threshold of sensitivity of elastic measuring parts.

Communications

Using the Seedlink server, your system can be configured to automatically import the MiniSeed data straight into the analysis software. The SMHR2 has a large non-volatile internal memory providing a substantial data buffer for when the connection is not available or when you require historical data from the recorder.

With smart setup options, the SMHR2 gives you the choice between automatic data transfer of Seedlink data or the option to transmit ultra low latency data for Earthquake Early Warning applications (EEW). For EEW applications, simply set up your SMHR2 to send data via REF TEK's RTPD software in near real time to your EEW software – resulting in answers for quick decision making when it counts.



BENEFITS

- » >135 dB dynamic range for detailed event data & high quality scientific analysis
- » Ultra low latency for Earthquake Early Warning Systems
- » Built-in Seedlink server for robust data transmission
- » Precise & accurate timing
- » Low-noise, force balance accelerometer
- » Sensitivity & offset stable

RELIABLE PERFORMANCE FOR:

- » Earthquake Early Warning
- » Local and regional broadband seismic networks
- » Structural health monitoring

SMHR2

A/D CONVERTER

Type	32-bit SAR A/D converters
Dynamic Range	>135 dB @100 sps
Input Channels	3
Gain Selection	x1 and x2
Input Full Scale	Matched @ x1 gain
Input Impedance	26 Kohms, 0.002 uFd, differential @ x1 2 Mohms, 0.002 uFd, differential @ x64
Common Mode Rejection	>90 dB
Sample Rates	1000, 500, 250, 200, 125, 100, 50, 40, 20, 10, 5, 1 sps
Multiple Sample Rates	Supported for rates in the group 1000, 200, 100, 50, 40, 20, 10, 5, 1
Sampling	Simultaneous on all channels
FIR Filter	140 dB down in the stopband

TIME BASE

Type	GNSS Receiver with Internal Disciplined Oscillator
Accuracy with GNSS	±10 µsec after validated 3-D Fix and Locked
Free-Running Accuracy	0.1 ppm over the temp. range of 0°C to 70°C 0.2 ppm from -30°C to 0°C
Alternate Time Sources	PTP or NTP

POWER

Input Voltage	9–24 VDC
Average Power (3 channels, accelerometer, no communication, GNSS duty cycle)	2.4 Watts
Average Power (3 channels, accelerometer, with communication, GNSS duty cycle)	2.7 Watts
Internal Battery	1.2 Ah, Lead Acid
Low Voltage Disconnect	User-programmable. Additional hardware cut-off fixed at 9.0 Volts

RECORDING

Format	Miniseed, MRF
Transmission	SeedLink Server, RTP
Trigger Types	Continuous, STA/LTA, Level, Vote, Time, External and Cros
Internal Capacity	8 Gb internal Flash memory data buffer, USB

COMMS

Ethernet	10/100 Base-T, TCP/IP, UDP/IP, FTP, RTP DHCP, Static, Link-Local
WiFi	Access-point mode for local command & control
WebUI	Accessible via WiFi or Ethernet

UI

Screen	2.8" TFT
---------------	----------




ACCELEROMETER

ELECTRICAL

Full-scale Range	± 4 g, (Optional ± 2 g)
-------------------------	-------------------------

PERFORMANCE

Self-Noise	<1 µm/s/s
Dynamic Range	>155 dB (DC to 10 Hz)
Linearity	<0.1%
Frequency Response	DC – 250 Hz (+/-3 dB)
Damping	0.7
Self-test Response	Logic level input will produce consistent g level output
Lightning Protection	Built-in surge protection
Cross Axis Sensitivity	<1%
Hysteresis	<0.1% of full-scale
Thermal Drift	≤600 µg/°C

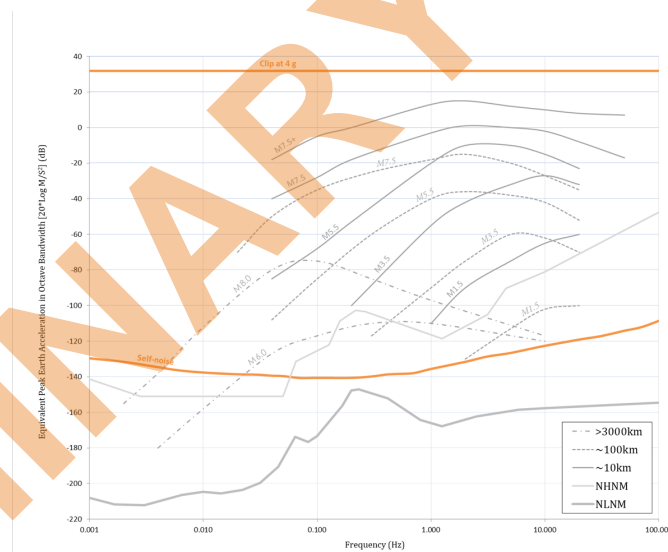

Reference: New Low-noise Model (NLNM)
J. Peterson (1993), Observation and Modeling of Seismic Background Noise, U.S. Geological Survey Open-File Report 93-322
Event Magnitudes
J. F. Clinton & T. H. Heaton (2002), Potential Advantages of a Strong Motion Velocity Meter over a Strong Motion Accelerometer, Seismological Research Letters, Vol. 73, No. 3, May/June 2002

MECHANICAL

Dimensions	6.75" x 5.5" x 4.5"
Weight	3.5 Kg
LEDs	✓
Magnetic Switch	✓
Watertight Integrity	IP 68
Humidity Range	0-100% (non-condensing)
Shock	Bubble level
Operating Temp	-20 °C to 60 °C
Storage Temperature	-40 °C to 85 °C
Mounting	Single Point
Levelling	3 Adjustable Feet
Compliance	CE, FCC, RoHS